


The SEKISUI logo is displayed in a blue, sans-serif font. The letter 'S' is stylized with a red dot above it. The logo is positioned in the top left corner of the slide, partially overlapping a background image of a green landscape.

Sound absorbing foam FUY-51

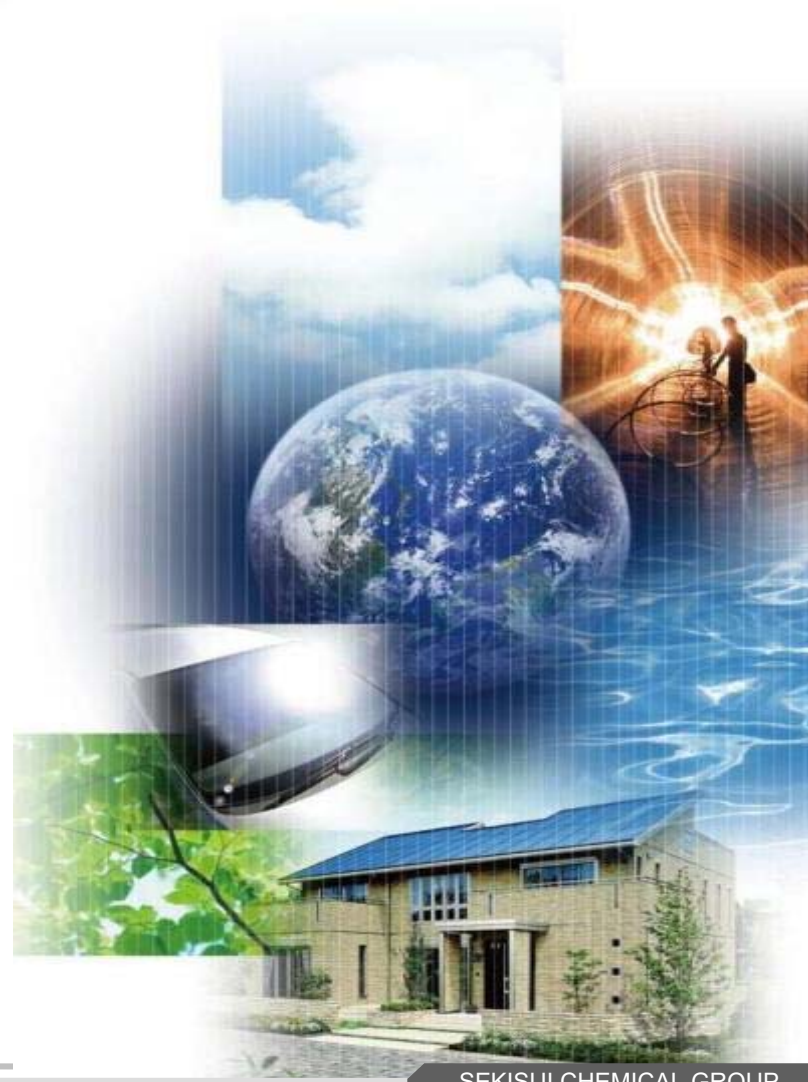


SEKISUI CHEMICAL GROUP

SEKISUI CHEMICAL GROUP

FUY-51 / Basic Characteristics

Features

- Sound absorption by low density
↳ Absorb high acoustic range
- No halogens
- UL HF-1 equiv. (applying)
- Thickness 2mm<

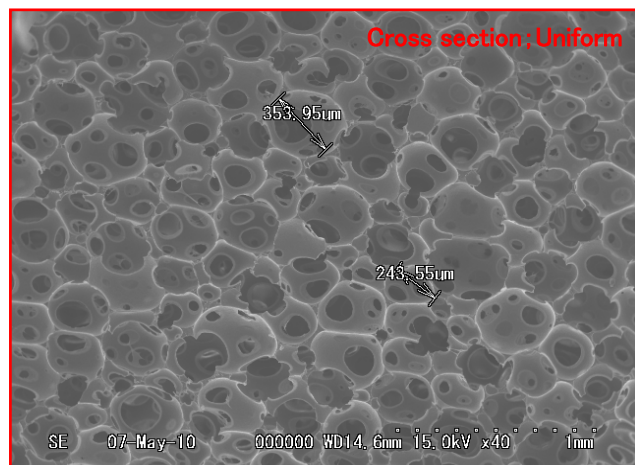

Basic Characteristics

		FUY-51
Color	(appearance)	Yellow
density	kg/m ³	58
Tensile Strength	kPa	270
Elongation	%	260
25%CLD	kPa	9.5
Flammability	(UL standard)	HF-1 (applying)

FUY-51 / Acoustic Characteristics

SEKISUI
Confidential

The vertical incident sound absorption coefficient

Test conditions:

JIS A 1405-1

Thickness : 2mm、5mm、10mm

Duct : $\phi 91.6\text{mm}$ 、 $\phi 40.0\text{mm}$

Mic : Probe tube microphone

Generated sound wave :

Multi-characteristic wave

