



RXR Series

Features

- 105°C, 2,000 hours assured
- Downsize, high allowable ripple current design
- Slim type included
- RoHS Compliance




Sleeve & Marking Color: Black & Golden

Specifications

Items	Performance													
Category Temperature Range	400V -40°C ~ +105°C	450V -25°C ~ +105°C												
Capacitance Tolerance	±20% (at 120Hz, 20°C)													
Leakage Current (at 20°C)	I = 0.02CV+25(µA, after 5 minutes) Where, C = rated capacitance in µF V = rated DC working voltage in V													
Tanδ (at 120Hz, 20°C)	<table border="1"> <tr> <td>Rated Voltage</td> <td>400</td> <td>450</td> </tr> <tr> <td>Tanδ (max)</td> <td>0.15</td> <td>0.20</td> </tr> </table>		Rated Voltage	400	450	Tanδ (max)	0.15	0.20						
Rated Voltage	400	450												
Tanδ (max)	0.15	0.20												
Low Temperature Characteristics (at 120Hz)	<p>Impedance ratio shall not exceed the values given in the table below.</p> <table border="1"> <tr> <td colspan="2">Rated Voltage</td> <td>400</td> <td>450</td> </tr> <tr> <td>Impedance</td> <td>Z(-25°C)/Z(+20°C)</td> <td>5</td> <td>6</td> </tr> <tr> <td>Ratio</td> <td>Z(-40°C)/Z(+20°C)</td> <td>6</td> <td>-</td> </tr> </table>		Rated Voltage		400	450	Impedance	Z(-25°C)/Z(+20°C)	5	6	Ratio	Z(-40°C)/Z(+20°C)	6	-
Rated Voltage		400	450											
Impedance	Z(-25°C)/Z(+20°C)	5	6											
Ratio	Z(-40°C)/Z(+20°C)	6	-											
Endurance	<table border="1"> <tr> <td>Test Time</td> <td>2,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000 hours at 105°C.</p>		Test Time	2,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value				
Test Time	2,000 Hrs													
Capacitance Change	Within ±20% of initial value													
Tanδ	Less than 200% of specified value													
Leakage Current	Within specified value													
Shelf Life Test	<table border="1"> <tr> <td>Test Time</td> <td>1,000 Hrs</td> </tr> <tr> <td>Capacitance Change</td> <td>With in ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Less than 500% of specified value</td> </tr> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements (Refer to JIS C 5101-4 4.1).</p>		Test Time	1,000 Hrs	Capacitance Change	With in ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Less than 500% of specified value				
Test Time	1,000 Hrs													
Capacitance Change	With in ±20% of initial value													
Tanδ	Less than 200% of specified value													
Leakage Current	Less than 500% of specified value													
Ripple Current & Frequency Multipliers	<table border="1"> <tr> <td>Frequency (Hz)</td> <td>60</td> <td>120</td> <td>500</td> <td>1k</td> <td>10k up</td> </tr> <tr> <td>Multipliers</td> <td>0.8</td> <td>1.00</td> <td>1.25</td> <td>1.45</td> <td>1.50</td> </tr> </table>		Frequency (Hz)	60	120	500	1k	10k up	Multipliers	0.8	1.00	1.25	1.45	1.50
Frequency (Hz)	60	120	500	1k	10k up									
Multipliers	0.8	1.00	1.25	1.45	1.50									

Diagram of Dimensions

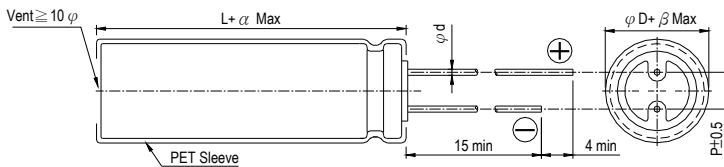

Lead Spacing and Diameter

Unit: mm

φD	10	12.5	16	18
P	5.0	5.0	7.5	7.5
φd	0.6		0.8	
α	2.0			
β	0.5			



Dimension & Permissible Ripple Current Dimension: $\phi D \times L$ (mm)
Ripple Current: mA/rms at 105°C

V. DC	Cap. (μ F)	10 ϕ			12.5 ϕ			16 ϕ			18 ϕ		
		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current	
			120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz
400V (2G)	27	10×30	315	475									
	33	10×35	355	535									
	39	10×40	425	640									
	47	10×45	485	730									
	56	10×50	535	805	12.5×35	530	795						
	68				12.5×40	610	915						
	82				12.5×45	690	1035	16×31.5	680	1,020			
	100				12.5×50	765	1150	16×35.5	775	1,165			
	120							16×40	865	1,300	18×31.5	825	1,240
	150							16×45	960	1,440	18×40	1,015	1,525
180							16×50	1,090	1,635	18×45	1,140	1,710	
220										18×50	1,240	1,860	
450V (2W)	22	10×30	290	435									
	27	10×35	340	510									
	33	10×40	395	595									
	39	10×45	440	660	12.5×30	420	630						
	47				12.5×35	485	730						
	56				12.5×40	550	825						
	68				12.5×45	630	945	16×31.5	625	940			
	82				12.5×50	680	1020	16×35.5	700	1,050			
	100							16×40	785	1,180	18×31.5	780	1,170
	120							16×50	915	1,375	18×35.5	840	1,260
150										18×45	1,045	1,570	
180										18×50	1,160	1,740	

Remark: Other sizes and specification are available, please contact us for detail.

Part Numbering System

RXR series 82 μ F \pm 20% 450V Bulk Package Gas Type 12.5 ϕ × 50L Pb-free and PET coating case

RXR **820** **M** **2W** **BK** - **1350**

Series Capacitance Capacitance Tolerance Rated Voltage Lead Configuration & Package Rubber Type Case Size Lead Wire and Coating Type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 10.